


# H Scaffold

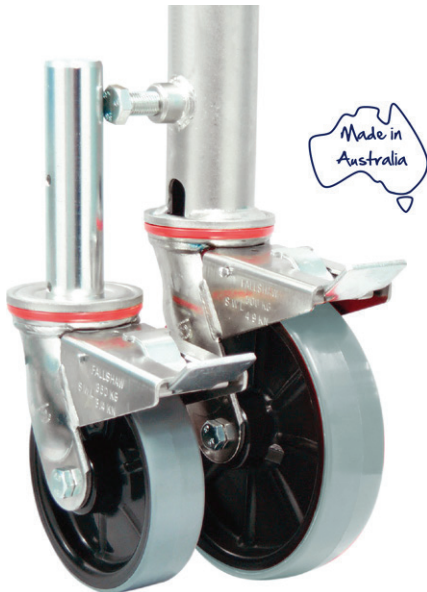

## Features that ensure Fallshaw castors satisfy OH&S Codes and Australian Standards:

- Castors are branded with makers name, and Safe Working Load (SWL)
- Supplied with a test certificate validating compliance to Australian Standards (important for risk management documentation)
- The static collapse load exceeds 3 times the working load
- Wheels 150mm (6") and 200mm (8") diameter to safely pass over obstacles without snagging and causing scaffold to tip
- The stem of the castor is 150mm (6") long, with not more than 3mm (1/8") of clearance to tube
- An effective wheel/swivel brake is fitted to ensure maximum stability

|  Swept Radius |  Mount Height |  Load Capacity |  Castor type   |  51<br>2<br>Socket mounting to fit over tubes |  ISO plate 130mx100m |  38<br>1 1/2<br>Solid stem with fully welded cup |  38<br>1 1/2<br>Stem mounting to fit into tubes |  27<br>1 1/16<br>Stem mounting to fit into tubes |
|---|--|---|---|--|--|---|--|---|
| 165<br>6 7/16   | 188<br>7 3/8   | 360kg<br>795lb  | 150mm PU HUR150/HZHTB fitted with scaffold pintle & SWL branding<br> | SC08   | SC61   | SC62  | SC30   | SC05  |
| 175<br>6 7/8  | 238<br>9 3/8   | 500kg<br>1100lb   | 200mm PU HUR200/HZHTB with fitted scaffold pintle & SWL branding<br> | SC13   | SC18   | SC15  | SC11   | SC10  |