


## Bolt Down Adjustable Feet

- The base is made from Nylon reinforced with fibre glass
- Two Mounting Holes for superior fixing to the floor.
- Threads available in Zinc or 304 Stainless steel
- Ball Joints are manufactured from steel to ensure superior strength and reliability
- Rubber base with friction dimples to ensure stability

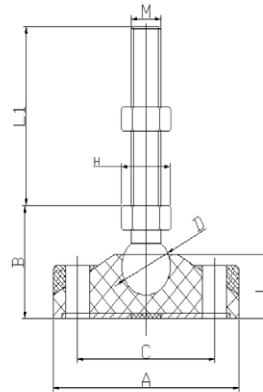

### Stainless Steel Threads (304 Grade)

PART NO.	A	M	L1	B	L	D	H	C	Max Static Vertical Load
CGAFBD1080100S	80	M10 X 1.5	100MM	32	19	15.3	17	56	700KG
CGAFBD1280100S	80	M12 X 1.75	100MM	35	19	15.3	17	56	750KG
CGAFBD16100150S	100	M16 X 2.00	150MM	46	30	23.5	24	75	900KG
CGAFBD20100150S	100	M20 X 2.5	150MM	46	30	23.5	24	75	1200KG

### Zinc Threads

PART NO.	A	M	L1	B	L	D	H	C	Max Static Vertical Load
CGAFBD1080100Z	80	M10 X 1.5	100MM	32	19	15.3	17	56	700KG
CGAFBD1280100Z	80	M12 X 1.75	100MM	35	19	15.3	17	56	750KG
CGAFBD16100100Z	100	M16 X 2.00	100MM	46	30	23.5	24	75	900KG
CGAFBD20100150Z	100	M20 X 2.5	150MM	46	30	23.5	24	75	1200KG

Custom lengths available on request