


## Adjustable Feet

- The base is made from Nylon reinforced with fibre glass.
- Threads available in Zinc or 304 Stainless steel
- Ball Joints are manufactured from steel to ensure superior strength and reliability
- Rubber base with friction dimples to ensure stability

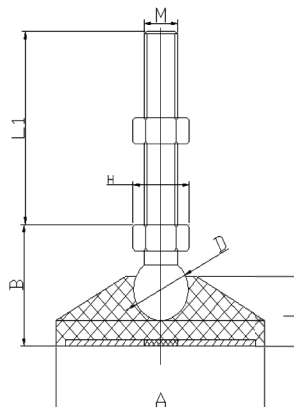

### Zinc Thread

	A	M	L1	B	L	D	H	
PART NO.	Base Diameter	Thread Diameter Zinc	Thread Length	Base Height	Height of Nylon Base	Ball Head Diameter	Hex Nut Diameter	Max Static Vertical Load
AF0840ZP	40	M8 X 1.25	64MM	32	19	15.3	17	350KG
AF1040ZP	40	M10 X 1.5	64MM	32	19	15.3	17	400KG
AF1260ZP	60	M12 X 1.75	64MM	40	25	15.3	17	650KG
AF1680ZP	80	M16 X 2.00	64MM	42	25	23.5	24	750KG

### Stainless Steel Thread (304 Grade)

	A	M	L1	B	L	D	H	
PART NO.	Base Diameter	Thread Diameter S/S	Thread Length	Base Height	Height of Nylon Base	Ball Head Diameter	Hex Nut Diameter	Max Static Vertical Load
AF1040SS	40	M10 X 1.5	64MM	32	19	15.3	17	400KG
AF1260SS	60	M12 X 1.75	64MM	40	25	15.3	17	650KG
AF1680SS	80	M16 X 2.00	64MM	42	25	23.5	24	750KG

Custom lengths available on request