


# Track Wheels - Single Flange

Capacity up to 4000kg per wheel

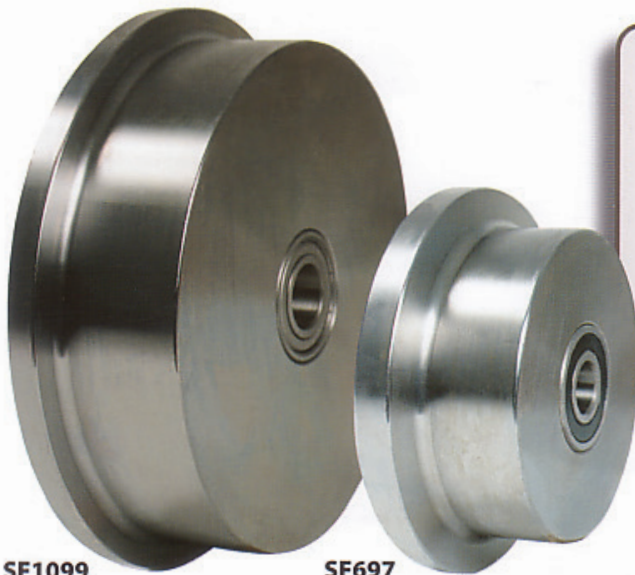

- Single flange wheels are designed to run on Railway line
- Can be used on other sections such as RHS
- Made from cast iron and steel to suit your application with axle shafts available
- Track wheels can be flame hardened to increase wear resistance

## Specifications & Fittings

SF1099

SF697



Wheel Diameter (mm)



Rim Width (mm)



Flange Width (mm)



Flange Diameter (mm)



Boss Width (mm)



Boss Diameter (mm)



Axle Diameter



Bearing Type



Load Capacity



Wheel Code

Wheel Diameter (mm)	Rim Width (mm)	Flange Width (mm)	Flange Diameter (mm)	Boss Width (mm)	Boss Diameter (mm)	Axle Diameter	Bearing Type	Load Capacity	Wheel Code
75	45	10	100	55	Solid	20 or 25mm	Ball	750	SF399
100	25	10	120	42	40	3/4"	Plain	375	SF499
100	50	20	130	70	Solid	20 or 25mm	Ball	1300	SF492
100	25	10	120	42	40	1/2"	Ball	375	SF499
150	40	9	175	53	62	3/4" or 25mm	Plain	1000	SF699
150	50	20	192	76	Solid	25mm	Ball	2000	SF697
150	40	9	175	53	62	5/8" or 20mm	Ball	1000	SF699
200	50	14	225	64	Solid	25 or 50mm	Plain	3000	SF899
200	39	16	228	55	101	35mm	Ball	1100	SF891
200	50	14	225	64	Solid	20 or 25mm	Ball	1500	SF899
250	50	15	290	65	Solid	25 or 50mm	Plain	1800	SF1099
250	52	12	285	75	125	45mm	Ball	2400	SF1098
250	50	15	290	65	Solid	25mm	Ball	1800	SF1099
300	52	14	360	95	150	50mm	Ball	4000	SF1299
350	57	17	420	83	105	30mm	Ball	3800	SF1499

**CAN'T FIND WHAT YOU ARE LOOKING FOR? PLEASE ENQUIRE WITH OUR TECHNICAL SALES STAFF AS WE WILL MANUFACTURE TO SUIT YOUR REQUIREMENTS**